

Hanging Sign Setup Instruction Sheet

Step 1: Unpack the Hanging sign from its bag. Make sure you have all the parts

Top Rails (T1-T10) x 10
Bottom Rails(B1-B10)x10

Vertical Beam x 5

Graphic x 1

Screws x 7

Screw Eye x 3

Cable x 3

Quick Links x 3

Harness Ring x 1

Allen Key x 1

Step 2: Setting up the Rails

1) Connect the Top Rails matching the number (i.e. T1 with T1). Make sure the push pin is locked.

2) Repeat for the Bottom Rails (i.e. B1 with B1).


Note: When connecting the last joint, have someone stand across from you to brace the hoop.




Step 3: Setting up the vertical beams

1) Lineup the Upper Rails to the Bottom Rails by matching their numbers (ie T1 with B1).

2) For the rails labeled T1-T2, T3-T4, and T5-T6, secure the Vertical Beam using the Screw Eye.

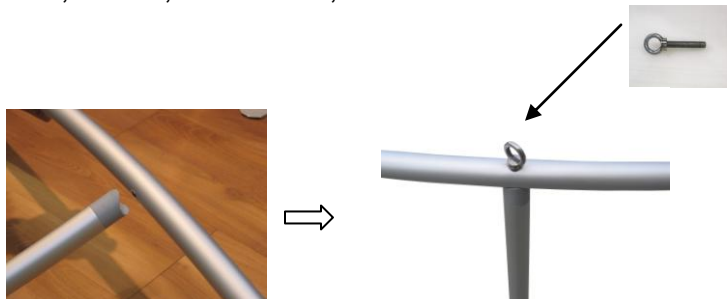


3) Using the Allen key, insert the Screws to secure the remaining Vertical Beams.

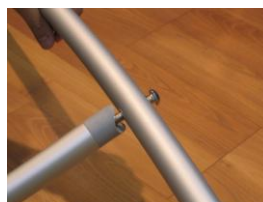


Note: Make sure the arch of the vertical beam faces inside.

Step 4: Installing the graphic

- 1) Unzip the graphic and spread it out on the ground.

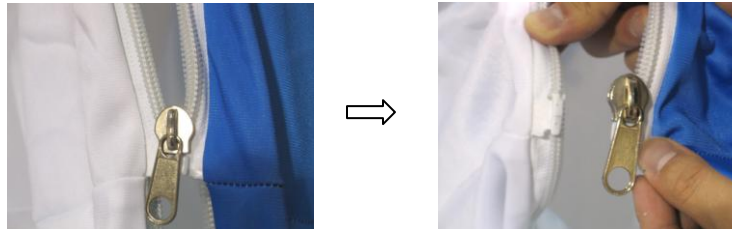

- 2) Place the frame onto the middle way of the graphic. Also, make sure the hole on the graphic lining up with the screw eye.
- 3) Remove the screw eye and secure 1 hole onto the frame with the screw eye.

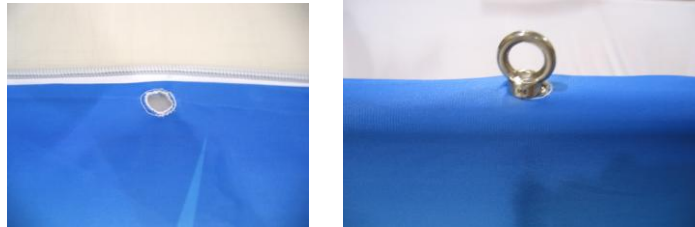

- 4) Zip up the graphic and secure the other 2 holes on the graphic at the screw eye.
- 5) Secure the Quick Link onto the screw eye.
- 6) Use Harness Ring to link all 3 cables together for hanging if necessary.



To Disassemble: Reverse Set Up instructions.