

SEG Backlit Setup Instruction Sheet

Step 1: Expand the *Frame*


Take out the *Frame* from the *Case*.



Expand *Frame*.



Step 2: Stand *Frame* up

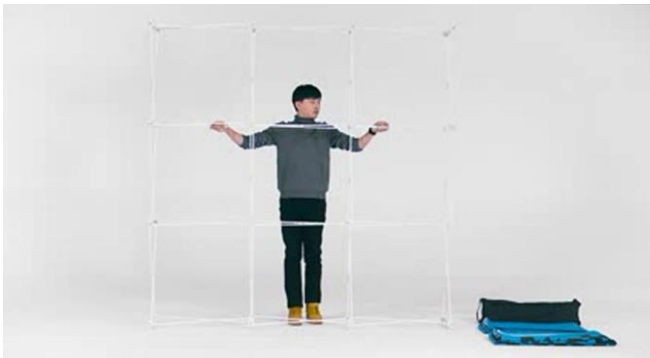

Step 3: Connecting the *Support Clips*

Gently push the *middle support clips* together until they click.



Step 4: Install *Side Channel Bars*

a) Insert *side channel bar* in at one end.



b) Swing it until it fits in at the other end.




Step 5: Install *Front and Back Channel Bars*

a) Line up the **channel bars** up with the grooves and gently push them in.



b) Continue all the way around and the back.

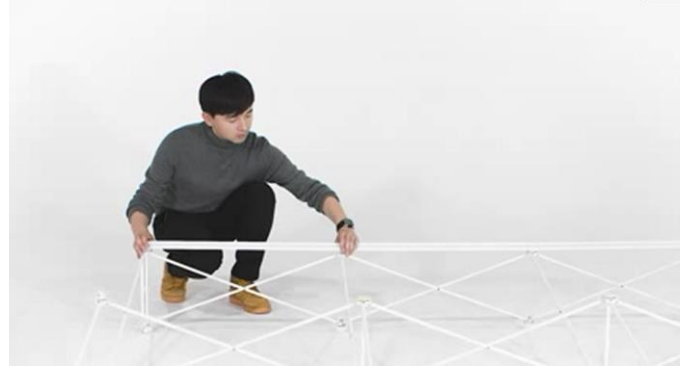

Step 6: Installing the *LED Ladder Lights*

a) Move the **LED lights** in place. Take notice of the label indicating the top position.



b) Secure the LED lights by clipping it on to the cross bars.



Step 7: Install the *Front Fabric Graphic*

a) Place the **fabric** in position over the frame.




b) Insert the **silicone edge** into the **channels**.



Step 8: Install *the Top and Side Fabric Graphics*

Using the same method as **Step 7**, install the *top and side fabric graphic*.

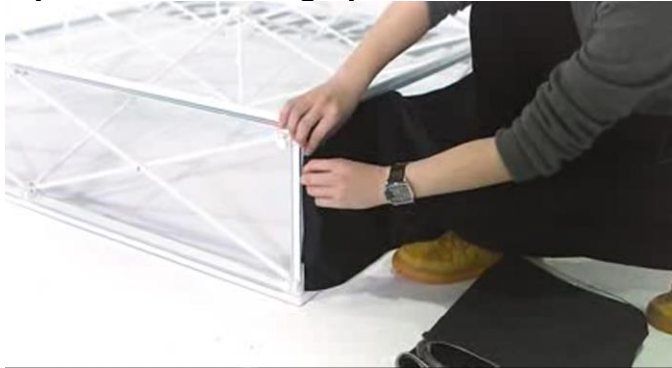

Step 9: Stand the *Frame* up



Step 10: Connecting *LED lights*

a) Connect the plug to the *transformer* and place it inside the frame.



b) Connect the *LED ladder lights* to the *transformer*.



Step 11: Install the *Back Fabric Graphic*

Using the same method as **Step 7**, install the *back fabric graphic (with the reflective side facing inwards)* and connect the power.



To disassemble: Reverse Steps 1 through 11.